



# Recovery of the sludge of a wastewater treatment plant by anaerobic digestion and biogas production

*Nedjah Nawel<sup>1,\*</sup>, Laskri Nabila<sup>1</sup>, Daas Doula<sup>2</sup>, Baccouche Mostefa<sup>1</sup>*

<sup>1</sup> Laboratory of Physical Metallurgy and Properties of Materials, Badji Mokhtar  
University - Annaba, 23000, Algeria

<sup>2</sup> Laboratory of industrial mechanic, Badji Mokhtar University - Annaba, 23000, Algeria

## Abstract

The aim of our research work is the realization of anaerobic digestion by using the organic sludge of the urban wastewater treatment plant as a substrate.

The biodegradable nature of the wastewater sludge allowed flammable biogas to be recovered after 24 hours of digestion and biogas production reached almost 5 liters for an initial concentration of 70 g / L

The rate of reduction in COD (chemical demand in oxygen) of the sludge was estimated at 87.3% .

For the good functioning of the digestion one must control the following parameters: type of substrate, pH of the medium, the organic load expressed in COD or BOD, the temperature. Once the operation is conducted we must follow the VFA / CAT (Volatile Fatty Acid/ Complete Alkalimetric Title) parameter which shows if the process will continue or will be stopped. And finally, the C / N ratio gives us an indication if there is more carbon in the medium, this will indicate that the residence time is going to be very long in the reactor and if nitrogen is abundant in the organic matter it will produce in the digestion medium ammonia which inhibits the degradation process and stops it in the acidogenic phase and the production of biogas.

The use of anaerobic digestion can be an interesting solution to dispose of energy from organic waste, while effectively participating in the remediation of these effluents. This renewable energy, inexpensive, non-polluting can replace conventional and non-renewable fossil fuels.

Keys words: Organic matter, biogas, anaerobic digestion, sludge.



## Introduction

The new sources of energy will have to have as main characteristic a near zero balance in  $\text{CO}_2$ . Among them, the pathways of bioenergy production from waste are particularly interesting. A first, relatively old pathway is related to the production of methane by anaerobic digestion. A second possibility, much more recent and innovative, is the production of hydrogen by microbial ecosystems. The use of renewable energies such as biogas has become a necessity and is an integral part of the current strategy to mobilize all available resources (Demayer 1982).

Methanation or anaerobic digestion is a series of operations of biological degradation of organic matter by a microbial flora that occur in the absence of oxygen.

Products resulting from degradation can be classified into two categories, biogas and digestate. Biogas is a mixture of methane ( $\text{CH}_4$ ), carbon dioxide ( $\text{CO}_2$ ) and water vapor ( $\text{H}_2\text{O}$ ).

Methane is the main constituent of natural gas. The digestate is the liquid residue containing the non-degraded materials.

The process of anaerobic digestion is carried out in four stages (Gautron. P. 1990).

These are the steps (Fig. 1.):

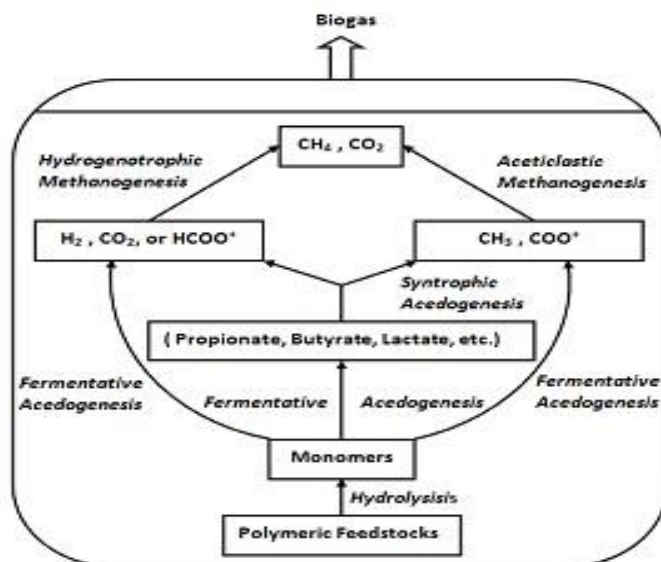


Fig. 1. Anaerobic digestion steps [4].

Experiments are conducted on sludge from a wastewater treatment plant by.



## Methods

Our study includes laboratory experiments on the anaerobic digestion of organic waste. For this, a specific material for handling is necessary to know : - A digester of 1 liter equipped with a sampling ; - A water bath to set the temperature at 37 ° C.

- A system for measuring the volume of gas produced (measurement of volume by the method of displaced liquids) [5].

The parameters monitored are: pH measurement, temperature measurement, volume of biogas produced and chemical oxygen demand (COD). The anaerobic is must be controlled very rigorously in the digester before the launch of the waste digestion reaction. The experiments are conducted with a residence time of 20 to 30 days.

Substrate of choice: Sludge of wastewater treatment plant. A wastewater treatment plant is a set of facilities and processes where wastewater is directed to eliminate the various pollutants. We will be particularly interested in a natural lagoon type, used as a sludge producer in our study. It is the most used biological treatment for medium-sized stations (more than 2000 equivalent inhabitants). The sludge is taken from the settling pond n°3. The physicochemical characteristics are given s on average of the samples taken during one year (see TABLE I.).

TABLE I. Composition of the Wastewater Sludge

Parameters	Composition
DCO (mg /l)	1500
pH	8
DBO (mg/l)	750

The evolution of the organic load during digestion, expressed as the volume of biogas produced, is carried on the Figure 2. This clearly shows the relationship between the volume of biogas formed and the organic matter digested in anaerobic environment. Metanogenetic bacteria transform organic dry matter into biogas.

A sample of sludge was taken from the third basin of the treatment plant by natural lagoon and this to carry out an anaerobic digestion of this waste.



This sample is placed in the digester according to the following operating conditions:

Concentration of the sludge substrate: 100 g / l

Initial pH: 7.76

COD : 760 mg / L

The evolution of the volume of biogas formed and the degradation of the sludge organic load of the wastewater treatment plant are shown in Table I. We notice a biogas production from the 2<sup>nd</sup> day of anaerobic digestion and this is very necessarily the biodegradable nature that sludge. This is proved by the volume of biogas produced during each experiment (see Fig. 2.).

Anaerobic digestion degrades organic matter in sludge and produces flammable biogas efficiently and very quickly .

Thus, the more the sludge is loaded with organic matter, the more the methanation will be effective(Laskri. N. and al. 2016).

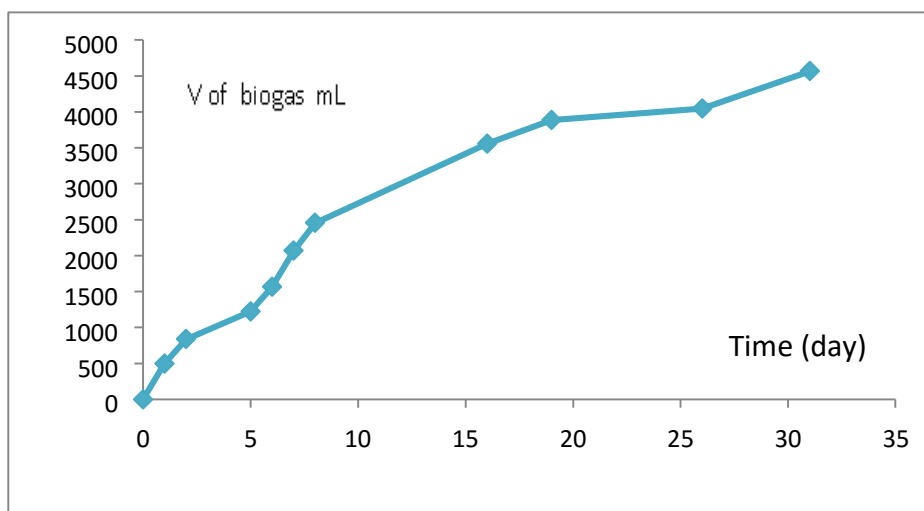


Fig. 2. Evolution of biogas production

In general, the volume of biogas increases with the residence time and the concentration of the substrate (BEBIN. J. 1969). Only high concentrations require a very long residence time for digestion (Boeglin. J. 1990 ).

Factors affecting the quality and quantity of biogas are: pH, temperature, substrate solids content, carbon / nitrogen ratio, residence time in the digester, homogeneity and particle size of the substrate (Bourgois. J. Debray. B. et Laforest. V. 1990).

The batch digester has the advantage of being simple.

This system has the advantage of treating solid waste, the production of biogas is not regular, it is slow then it accelerates and reaches a maximum rate in the middle of the



degradation process and falls at the end of the cycle when only the elements with difficulty digestible remain in the digester (Demayer 1982, Cheremisinoff. 2003).

Sludge from sewage plants gives a very good output in biogas production. This is inevitably due to the biodegradability of this sludge (Zheng. Y. and al. 2014, Gautron. P. 1990).

The graph with the evolution of the chemical oxygen demand (COD) based on stays of time gives a decrease in organic biodegradable load based on the digestion of residence times as shown in Fig. 3.

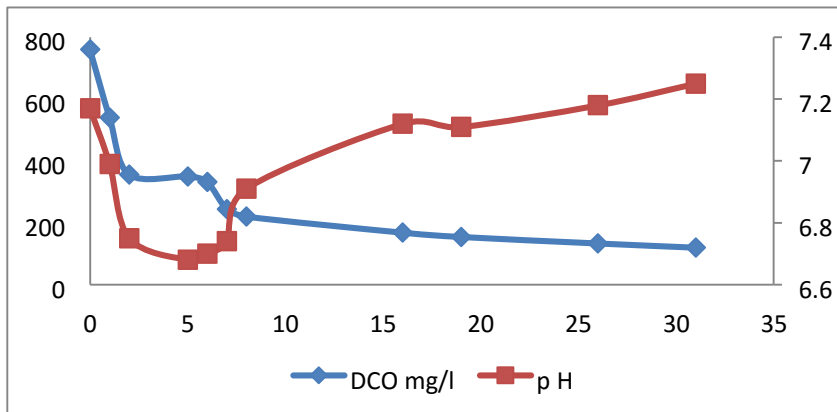


Fig. 3. Evolution of Organic matter and pH during digestion

## Results

Anaerobic digestion tests carried out in the laboratory using a one-liter reactor have allowed the production of renewable and green energy with a CH<sub>4</sub> % greater than 70% [8]. This has been confirmed by the flammability of the biogas produced. The digestion substrate is biodegradable and can be used for renewable and inexhaustible energy (Laskri. N. and al. 2016, Maes. M. 1990). The methanogenesis phase is the final and specific step of methane fermentation. It leads to the reduction of carbon to methane and is carried out by highly specialized microorganisms.

During this phase, the chemical oxygen demand decreases in order to produce biogas, the more the substrate is concentrated in biodegradable organic matter the more it produces biogas (Zhoua. J. and al. 2017, Murat. M. 1981); this was confirmed by the digest substrate during our study (see TABLE. II).

TABLE. II Amount of organic matter (COD) during anaerobic digestion



Time (day)	T (°C)	COD (mg/l) Sludge
0	35	543.54
1	37	487.6
2	37	458.8
3	37	402.3
5	34	385.8
10	34	321.4
13	37	267.7
16	36	202.3
19	37	178
21	37	132.55
25	36	111.50
28	34	103
30	34	86.9
32	37	80.5
35	37	74
40	37	73
50	36	70
60	37	69
Decrease Rate		87.3 %

Sludge from sewage plants gives a good yield through anaerobic digestion (Tou. I. Igoud. S. et Touzi. 2001).

### Conclusion

Anaerobic digestion is an effective, easy-to-use and economical way of treating organic waste. This process makes it possible to reduce the use of fossil fuels, especially in regions where the connection of natural gas and electricity would be very expensive, as well as the production of valuable energy that is biogas. Also, this process contributes to the depollution of the organic charges. Not to mention another advantage that is the production of a digestate that can be valued as an organic amendment of soils low in organic matter.



Organic waste, especially when it has a high water content, is not intended to be dumped or even incinerated. This requires a strong limitation of landfilling of fermentable waste. Achievement of this objective requires significant efforts in three directions: the reduction of waste production, the increase in the recycled portion and the development of composting, whether or not anaerobic digestion is carried out. The important treatment of this organic matter is the energy recovery of waste by the anaerobic digestion process and represents a very interesting alternative. It is a "renewable" energy source as long as we produce waste and the cost is low.

## References

- BEBIN. J. État de l'épuration des eaux résiduaires urbaines et industrielles »Technique de l'Eau n° 269, mai 1969.
- Boeglin. J. Traitements biologiques des eaux résiduaires. Techniques de l'Ingénieur 1990.
- Bourgois. J. Debray. B. et Laforest. V. Traitements chimiques et physico-chimiques des déchets. Techniques de l'Ingénieur 1990.
- Cheremisnoff. Handbook of solid waste management and waste minimization technologies. 2003, Elsevier Science.
- Demayer « la conversion bioenergetique. Edition tec et doc 1982 pp 214-220.
- Gautron. P. Valorisation et recyclage des déchets . Techniques de l'Ingénieur 1990.
- Laskri. N. and al. 2016. Biogas production from the anaerobic digestion of lignocellulosics wastes. *Poll Res.* 35: 247-252.
- Maes. M. La maîtrise des déchets industriels. Edition Johannet et fils 1990.
- Murat. M. « Valorisation des déchets et des sous- produits industriels ». 2<sup>e</sup> Édition Masson 1981.
- Scriban. R. Biotechnologie. 4<sup>e</sup> édition TEC et DOC pp 701-707.
- Tou. I. Igoud. S. et Touzi. 2001. A. Production de biométhane à partir des déjections animales. *Revue des énergies renouvelables* ; pp 103-108.
- Zhoua. J. and al. 2017. Different organic loading rates on the biogas production during the anaerobic digestion of rice straw: a pilot study. *Bioresource Technology*. Elsevier.
- Zheng. Y. and al. 2014. Pretreatment of lignocellulosic biomass for enhanced biogas production. *Progress In Energy and Combustion Science*. Elsevier.