



6TH INTERNATIONAL CONFERENCE ON KNOWLEDGE & INNOVATION IN ENGINEERING, SCIENCE & TECHNOLOGY

6 - 8 MARCH 2020

BUDAPEST, HUNGARY

Effect Of Switch Probability In Flower Pollination Algorithm On Optimization Of Tuned Mass Dampers

Sinan Melih Nigdeli^{1,*}, Gebrail Bekdaş² and Yusuf Öztürk³

¹Istanbul University - Cerrahpaşa/ Department of Civil Engineering

² Istanbul University - Cerrahpaşa/ Department of Civil Engineering

³ Istanbul University - Cerrahpaşa/ Department of Civil Engineering

Abstract.

Metaheuristic algorithms are the numerical algorithm processes which inspired from natural happenings involving life, species, processes and evolution. These algorithms are perfectly effective on engineering optimization including structural engineering. The advantage of the algorithms is the capability to solve optimization problems which are non-linear due to design constraints. Also, some problems cannot be mathematically derived. Because of damping, optimum tuning of tuned mass dampers (TMDs) are done via numerical algorithms including metaheuristic ones. In the present study, the optimum design of TMDs was done via flower pollination algorithm (FPA). FPA inspired from pollination process of flowering plants and several types of pollinations are used in the generation of two optimization phases; namely global and local optimization. To choose one of these phases in an iteration, a switch probability is used. The novelty of the study is the investigation of different values of switch probability on optimum TMD parameters and objective function of the optimization which is minimization of structural responses under seismic excitations. Thus, the best switch probability values in the optimization of TMDs are presented.

Keywords: Structural control; tuned mass damper; optimization; metaheuristic algorithms; flower pollination algorithm.



6TH INTERNATIONAL CONFERENCE ON KNOWLEDGE & INNOVATION IN ENGINEERING, SCIENCE & TECHNOLOGY

6 - 8 MARCH 2020

BUDAPEST, HUNGARY

1. Introduction

Metaheuristic methods are the algorithms which are generally used in optimization variables of a function or multiple functions. The minimization and maximization of analysis results of an engineering structure are also in the scope of metaheuristics. The applications include structural engineering problems using structural dynamics topic. One of the basic application areas of metaheuristics is to optimize tuned mass dampers (TMDs) for structures subjected to unsteady vibration resulting from strong winds and earthquakes.

TMDs are vibration absorber devices, which are the combination of a mass, stiffness elements and dampers. For an effective performance on damping and reduction of vibrations, the parameters about the components of TMDs must be tuned according to the characteristic of applied structure. Although several basic form formulations have been proposed [1-3], numerical optimization techniques were also studied [4-7] to overcome the assumptions done in the optimization. Especially in the last decade, metaheuristic algorithms were highly used in optimum tuning of TMDs. The employed metaheuristic algorithms are genetic algorithm [8-12], particle swarm optimization [13-14], bionic optimization [15], harmony search [16-19], ant colony optimization [20], artificial bee optimization [22], teaching-learning-based optimization [23] and flower pollination algorithm [24].

Metaheuristic algorithms include special parameters in the design. One of these parameters which is generally exist in all metaheuristic algorithms, is a probability used for controlling the type of optimization. Generally, metaheuristic methods include two types of optimization; namely global and local optimization.

Flower pollination algorithm (FPA) developed by Yang [25] uses switch probability (sp) to control global and local optimization stages. In the present study, the optimum TMD properties are presented for different values of sp and the performance of the optimization are evaluated.

2. Optimization of TMDs via FPA

FPA is a metaheuristic algorithm inspired by the process of pollination of flowering plants. By the modelling of several pollination types, two types of optimization are proposed, and these stages are controlled by a switch probability value called switch probability (sp).

The first stage to mention is global pollination (optimization) process. This process involves the inspiration of biotic and cross-pollination. In biotic pollination, pollinators carry the pollens of flower. Cross pollination is the reproduction process of different species of flowers. Biotic pollination involves the transfer of pollens in long distances since pollens are carried by pollinators such as insects, bees and animals. Also, cross-pollination involves a high range of species of flowers. Since these properties show similarities of global pollination, these types are used as global optimization.



6TH INTERNATIONAL CONFERENCE ON KNOWLEDGE & INNOVATION IN ENGINEERING, SCIENCE & TECHNOLOGY

6 - 8 MARCH 2020

BUDAPEST, HUNGARY

$$x_i^{t+1} = x_i^t + L(x_i^t - g^*) \quad (1)$$

In the Eq. (1), x_i^{t+1} represent the candidate solution results of i^{th} flower (population) at t^{th} iteration. The updated solution of next iteration (x_i^{t+1}) is found according to best existing solution (g^*) with best value of objective function and a Lévy distribution (L) representing the random flight of pollinators.

Local optimization is generated via biotic and self-pollination. Self-pollination is done between flowers of the same species. During abiotic pollination, the pollen transfer is done without the help of pollinators. Self-fertilization (like peach) or natural factors (wind, diffusion in the water) play an important role in reproduction. The pollen transfer distance is shorter in abiotic pollination and a single type of flower involves in self-pollination. As seen in Eq. (2), a linear distribution (ϵ) is used by using two randomly chosen existing (x_j^t and x_k^t) in local pollination.

$$x_i^{t+1} = x_i^t + \epsilon(x_j^t - x_k^t) \quad (2)$$

The optimization process of TMD optimization are listed as follows:

- i. Enter structural properties, ranges of design variables, population (number of flowers), algorithm parameter (switch probability, sp), earthquake records used in the optimization.
- ii. Randomly assign design variables to generate and initial solution matrix for all flowers and analyze the structure to find objective function value for all set of candidate solutions.
- iii. Update the solution via global or local pollination by controlling a random number with sp , and also update value of objective function.
- iv. Compare new and existing solutions and update the new ones if value of the objective function is better than the existing one.
- v. Iteratively continue the steps iii and iv until several maximum number of iterations.

The objective function of the optimization problem is to minimize the maximum top story displacement of the structure under ground acceleration ($\ddot{x}_g(t)$). The design variables are mass (m_d), period (T_d) and damping ratio (ξ_d) of TMD positioned on the top of the structure as seen in Fig. 1. In the study, a three-story structure was investigated.




6TH INTERNATIONAL CONFERENCE ON KNOWLEDGE & INNOVATION IN ENGINEERING, SCIENCE & TECHNOLOGY

6 - 8 MARCH 2020

BUDAPEST, HUNGARY

Figure 1: Three story structure with a TMD on the top

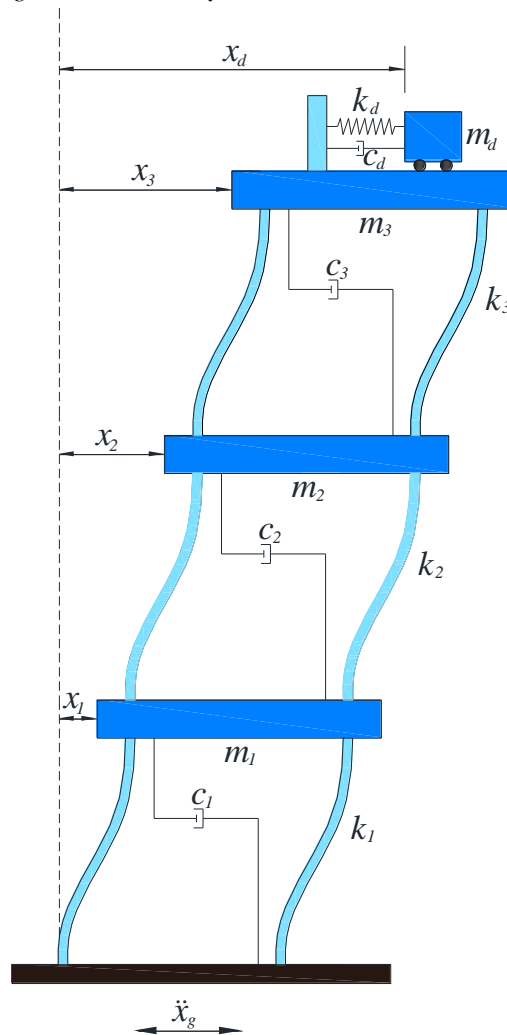

The matrices such as mass (M), stiffness (K) and (C) are as follows:



6TH INTERNATIONAL CONFERENCE ON KNOWLEDGE & INNOVATION IN ENGINEERING, SCIENCE & TECHNOLOGY

6 - 8 MARCH 2020

BUDAPEST, HUNGARY

$$M = \text{diag} [m_1 \ m_2 \ m_3 \ m_d] \quad (3)$$

$$K = \begin{bmatrix} (k_1 + k_2) & -k_2 & & & \\ -k_2 & (k_2 + k_3) & -k_3 & & \\ & -k_3 & (k_3 + k_d) & -k_d & \\ & & -k_d & k_d & \end{bmatrix} \quad (4)$$

$$C = \begin{bmatrix} (c_1 + c_2) & -c_2 & & & \\ -c_2 & (c_2 + c_3) & -c_3 & & \\ & -c_3 & (c_3 + c_d) & -c_d & \\ & & -c_d & c_d & \end{bmatrix} \quad (5)$$

The equation of the motion of the structure is given as Eq. (6). $x(t)$ is the displacement vector as shown as Eq. (7).

$$M\ddot{x}(t) + C\dot{x}(t) + Kx(t) = -M\{\cdot\}\ddot{x}_g(t) \quad (6)$$

$$x(t) = [x_1 \ x_2 \ x_3 \ x_d]^T \quad (7)$$

m_d , k_d and c_d are mass, stiffness and damping coefficient of TMD, respectively. The period of TMD (T_d) and damping ratio of TMD (ξ_d) are formulated as Eqs. (8) and (9), respectively.

$$T_d = 2\pi \sqrt{\frac{m_d}{k_d}} \quad (8)$$

$$\xi_d = 2c_d m_d \sqrt{\frac{k_d}{m_d}} \quad (9)$$

The optimized value of TMD must provide the following condition for the limitation of the stroke of TMD.

$$\frac{\max \left[|x_d - x_3| \right]_{\text{with TMD}}}{\max \left[|x_3| \right]_{\text{without TMD}}} \leq st_max \quad (10)$$

3. Numerical example

The structural properties are 360t, 6.2MN/m and 650MN/m for mass, stiffness and damping coefficient of a story, respectively. The st_max limit used in stroke limitation is 1. The optimization is done for different earthquake excitations and the critical one was considered for optimization. The records are presented in FEMA P-695 [26] as far-fault ground motions. These records are given as Table I.

The optimization of TMD was done for different sp values as seen in Table 2. Also, the design variable ranges are presented.



6TH INTERNATIONAL CONFERENCE ON KNOWLEDGE & INNOVATION IN ENGINEERING, SCIENCE & TECHNOLOGY

6 - 8 MARCH 2020

BUDAPEST, HUNGARY

Table 1: FEMA P-695 Far-fault ground motions.

Earthquake Number	Component
Northridge	NORTHR/MUL009
	NORTHR/MUL279
Northridge	NORTHR/LOS000
	NORTHR/LOS270
Duzce, Turkey	DUZCE/BOL000
	DUZCE/BOL090
Hector Mine	HECTOR/HEC000
	HECTOR/HEC090
Imperial Valley	IMPVALL/H-DLT262
	IMPVALL/H-DLT352
Imperial Valley	IMPVALL/H-E11140
	IMPVALL/H-E11230
Kobe, Japan	KOBE/NIS000
	KOBE/NIS090
Kobe, Japan	KOBE/SHI000
	KOBE/SHI090
Kocaeli, Turkey	KOCAELI/DZC180
	KOCAELI/DZC270
Kocaeli, Turkey	KOCAELI/ARC000
	KOCAELI/ARC090
Landers	LANDERS/YER270
	LANDERS/YER360
Landers	LANDERS/CLW-LN
	LANDERS/CLW-TR
Loma Prieta	LOMAP/CAP000
	LOMAP/CAP090
Loma Prieta	LOMAP/G03000
	LOMAP/G03090
Manjil, Iran	MANJIL/ABBAR--L
	MANJIL/ABBAR--T
Superstition Hills	SUPERST/B-ICC000
	SUPERST/B-ICC090
Superstition Hills	SUPERST/B-POE270
	SUPERST/B-POE360
Cape Mendocino	CAPEMEND/RIO270
	CAPEMEND/RIO360
Chi-Chi, Taiwan	CHICHI/CHY101-E
	CHICHI/CHY101-N
Chi-Chi, Taiwan	CHICHI/TCU045-E
	CHICHI/TCU045-N
San Fernando	SFERN/PEL090
	SFERN/PEL180
Friuli, Italy	FRIULI/A-TMZ000
	FRIULI/A-TMZ270



6TH INTERNATIONAL CONFERENCE ON KNOWLEDGE & INNOVATION IN ENGINEERING, SCIENCE & TECHNOLOGY

6 - 8 MARCH 2020

BUDAPEST, HUNGARY

Table 2: The optimum results


sp	Mass (t)	Period (s)	Damping ratio (%)
	Range	between 1% and 5% total mass of structure	between 0.5 and 1.5 times of the critical period of structure
0	54000	0.2881	0.3
0.1	54000	0.2881	0.3
0.3	54000	0.2795	0.3
0.5	54000	0.2875	0.2979
0.7	54000	0.2881	0.2999
0.9	54000	0.253	0.162
1	54000	0.2881	0.3

4. Conclusion

As seen in the results of optimum design variables, the FPA based methodology is effective to find similar optimum values except $sp=0.9$. This reason is resulting from trapping to local optimum solutions which have a close value to best objective function value.

Generally, the optimized TMD is effective to reduce the maximum displacement under critical excitation (DUZCE/BOL0000) by 10% for all sp cases. The top-story time history displacement for that excitation and $sp=0.5$ is shown as Fig.2.

Figure 2: Time history plot for critical excitation

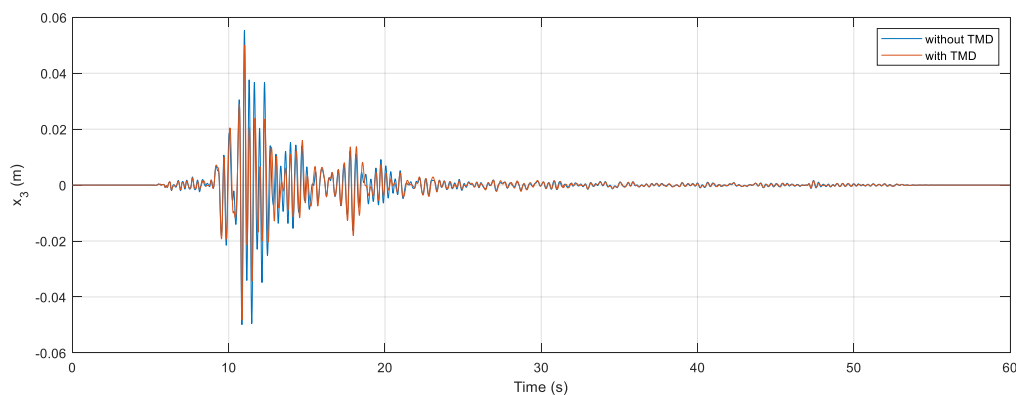

Since all results are close to each others, the essential evaluation of usage of different sp values can be done via convergence plot for 400 iterations. These plots are given as Fig. 3.




6TH INTERNATIONAL CONFERENCE ON KNOWLEDGE & INNOVATION IN ENGINEERING, SCIENCE & TECHNOLOGY

6 - 8 MARCH 2020

BUDAPEST, HUNGARY

Figure 3: Time convergence of objective function for sp cases

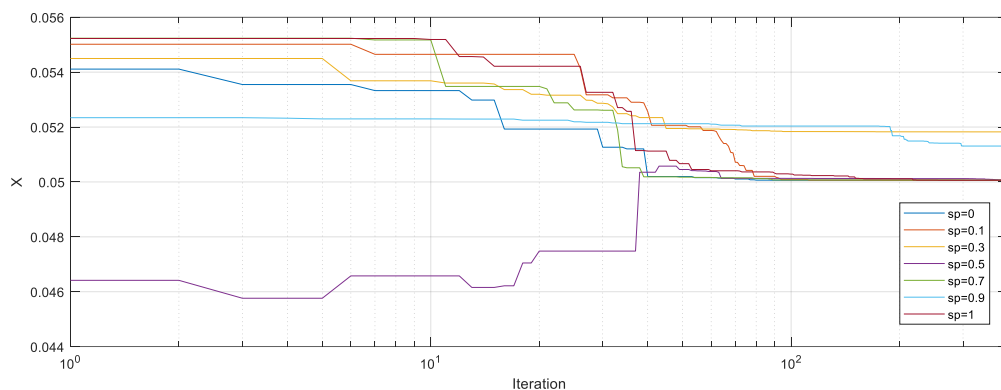

For $sp=0.9$ and $sp=0.3$, the methodology is effective to find results close to the best results. For all other cases, the best results are nearly found. For $sp=0.5$, the initial value starts from a low value, but this value violates the stroke capacity criterion. The value of objective function without violation is found. Then, it reduces to the best optimum value.

When sp is equal to 0, only local pollination is used, and it has a good convergence ability since the results assigned as initial values were quickly reduced after 40 iterations. Finding an effective value in the initial values helps the convergence for $sp=0$. Whereas, $sp=0.1$ has the worst convergence ability except $sp=0.3$ and $sp=0.9$, because the initial value is high. Similar situations can be also said for $sp=0.9$ case. It is clearly seen that $sp=0.7$ is the best option. The initial value is the highest one, but only a minor difference is seen between the best result and the result of 30th iteration. As a conclusion, global optimization with 70% is effective with 30% usage to local optimization.

References

- [1] J. P. Den Hartog, Mechanical Vibrations, third ed., Mc Graw-Hill, New York, 1947.
- [2] G.B. Warburton, Optimum absorber parameters for various combinations of response and excitation parameters, Earthq. Eng. Struct. D. 10 (1982) 381–401.
- [3] F. Sadek, B. Mohraz, A.W. Taylor, R.M. Chung, A method of estimating the parameters of tuned mass dampers for seismic applications, Earthq. Eng. Struct. D. 26 (1997) 617–635.
- [4] R. Rana, T.T. Soong, Parametric study and simplified design of tuned mass dampers, Eng. Struct. 20 (1998) 193–204.
- [5] C.C. Chang, Mass dampers and their optimal designs for building vibration control, Eng. Struct. 21 (1999) 454-463.



6TH INTERNATIONAL CONFERENCE ON KNOWLEDGE & INNOVATION IN ENGINEERING, SCIENCE & TECHNOLOGY

6 - 8 MARCH 2020

BUDAPEST, HUNGARY

- [6] C.L. Lee, Y.T. Chen, L.L. Chung, Y.P. Wang, Optimal design theories and applications of tuned mass dampers, *Eng. Struct.* 28 (2006) 43-53.
- [7] S.V. Bakre, R.S. Jangid, Optimal parameters of tuned mass damper for damped main system, *Struct. Control Hlth.* 14 (2007) 448-470.
- [8] M.N.S. Hadi, Y. Arfiadi, Optimum design of absorber for MDOF structures, *J.Struct. Eng.- ASCE* 124 (1998) 1272–1280.
- [9] G. C. Marano, R. Greco, B. Chiaia, A comparison between different optimization criteria for tuned mass dampers design, *J. Sound Vib.* 329 (2010) 4880-4890.
- [10] M.P. Singh, S. Singh, L.M. Moreschi, Tuned mass dampers for response control of torsional buildings, *Earthq. Eng. Struct. D.* 31 (2002) 749–769.
- [11] N.B. Desu, S.K. Deb, A. Dutta, Coupled tuned mass dampers for control of coupled vibrations in asymmetric buildings, *Struct. Control Hlth.* 13 (2006) 897–916.
- [12] S. Pourzeynali, H.H. Lavasani, A.H. Modarayi, Active control of high rise building structures using fuzzy logic and genetic algorithms, *Eng. Struct.* 29 (2007) 346-357.
- [13] A.Y.T. Leung, H. Zhang, Particle swarm optimization of tuned mass dampers, *Eng. Struct.* 31 (2009) 715-728.
- [14] A.Y.T. Leung, H. Zhang, C.C. Cheng, Y.Y. Lee, Particle swarm optimization of TMD by non-stationary base excitation during earthquake, *Earthq. Eng. Struct. D.* 37 (2008) 1223-1246.
- [15] R. Steinbuch, Bionic optimisation of the earthquake resistance of high buildings by tuned mass dampers, *J. Bionic Eng.* 8 (2011) 335-344.
- [16] G. Bekdaş, S.M. Nigdeli, Estimating Optimum Parameters of Tuned Mass Dampers Using Harmony Search, *Eng. Struct.* 33 (2011) 2716-2723.
- [17] G. Bekdaş, S.M. Nigdeli, Mass Ratio Factor for Optimum Tuned Mass Damper Strategies, *Int. J. Mech. Sci.* 71 (2013) 68-84.
- [18] S.M. Nigdeli, G. Bekdaş, Optimum Tuned Mass Damper Design for Preventing Brittle Fracture of RC Buildings, *Smart Struc. Syst.* 12(2) (2013) 137-155.
- [19] X-S. Yang, G. Bekdaş, S.M. Nigdeli, Review and Applications of Metaheuristic Algorithms in Civil Engineering. In 'Metaheuristics and Optimization in Civil Engineering'. Edited by X-S. Yang, G. Bekdaş, S.M. Nigdeli, Springer, Chapter 1, 2016.
- [20] A. Farshidianfar, S. Soheili, Ant colony optimization of tuned mass dampers for earthquake oscillations of high-rise structures including soil–structure interaction, *Soil Dyn. Earthquake Eng.* 51 (2013) 14-22.



6TH INTERNATIONAL CONFERENCE ON KNOWLEDGE & INNOVATION IN ENGINEERING, SCIENCE & TECHNOLOGY

6 - 8 MARCH 2020

BUDAPEST, HUNGARY

- [21] A. Farshidianfar, S. Soheili, ABC optimization of TMD parameters for tall buildings with soil structure interaction, *Interact. Multiscale Mech.* 6 (2013) 339-356.
- [22] A. Farshidianfar, S. Soheili, Optimization of TMD parameters for Earthquake Vibrations of Tall Buildings Including Soil Structure Interaction, *Int. J. Optim. Civ. Eng.* 3 (2013) 409-429.
- [23] S.M. Nigdeli, G. Bekdaş, Teaching-Learning-Based Optimization for Estimating Tuned Mass Damper Parameters, 3rd International Conference on Optimization Techniques in Engineering (OTENG '15), 7-9 November 2015, Rome, Italy.
- [24] Nigdeli SM, Bekdas G, Yang XS. Optimum Tuning of Mass Dampers for Seismic Structures Using Flower Pollination Algorithm. 7th European Conference of Civil Engineering (ECCIE '16), 17-19 December 2016, Bern, Switzerland.
- [25] X-S. Yang, Flower pollination algorithm for global optimization, in: *Unconventional Computation and Natural Computation 2012*, Lecture Notes in Computer Science, Vol. 7445, pp. 240-249 (2012).
- [26] FEMA P-695, Quantification of Building Seismic Performance Factors, Federal Emergency Management Agency, Washington DC, 2009.